


FLANGES

FLANGE QUADRADA ISO 6164 ADAPTADOR SOLDA TOPO TUBO SCH

FQ250 ISO6164.... ADAP (250 bar)
FQ250 ISO6164.... ADAP (400 bar)

Padrão ISO 6164 (1994:E)

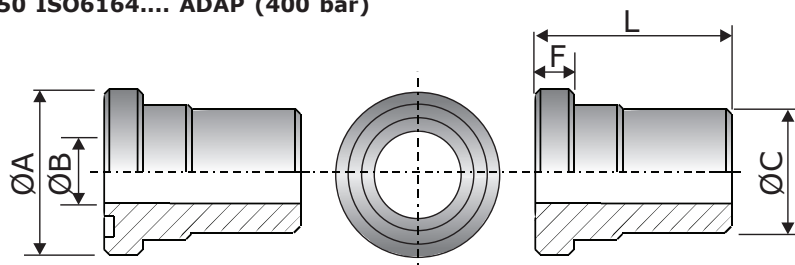

FQ250 ISO6164.... ADAP
FQ400 ISO6164.... ADAP
(O'ring face)

FQ250 ISO6164.... ADAP S/C
FQ400 ISO6164.... ADAP S/C
(Flat face)

250 bar - ISO 6164-Série L

Flange SAE ISO	Referência	A	B	C	F	L
3/8 10	FQ250 ISO6164-6 ADAP	24,5	10	17,5	6,8	40
1/2 13	FQ250 ISO6164-8 ADAP	30,2	13	21,6	6,8	50
3/4 19	FQ250 ISO6164-12 ADAP	38,1	19	27,2	6,8	60
1 25	FQ250 ISO6164-16 ADAP	44,5	25	34,5	8,0	70
1.1/4 32	FQ250 ISO6164-20 ADAP	50,8	31	43,0	8,0	80
1.1/2 38	FQ250 ISO6164-24 ADAP	60,4	38	48,6	8,0	90
2 51	FQ250 ISO6164-32 ADAP	71,4	50	61,0	9,6	100
2.1/2 56	FQ250 ISO6164-40 ADAP	87,2	63	76,6	12,0	110
3 63	FQ250 ISO6164-48 ADAP	101,6	70	89,0	15,0	120
4 80	FQ250 ISO6164-64 ADAP	131,0	90	114,0	23,5	140

400 bar - ISO 6164-Série S

Flange SAE ISO	Referência	A	B	C	F	L
3/8 10	FQ400 ISO6164-6 ADAP	26,0	10	17,5	7,8	40
1/2 13	FQ400 ISO6164-8 ADAP	31,8	13	21,6	7,8	50
3/4 19	FQ400 ISO6164-12 ADAP	41,3	18	27,2	8,8	60
1 25	FQ400 ISO6164-16 ADAP	47,6	22	34,5	9,5	70
1.1/4 32	FQ400 ISO6164-20 ADAP	54,0	28	43,0	10,3	90
1.1/2 38	FQ400 ISO6164-24 ADAP	63,5	32	48,6	12,6	90
2 51	FQ400 ISO6164-32 ADAP	79,4	41	61,0	12,6	100
2.1/2 56	FQ400 ISO6164-40 ADAP	94,2	50	76,6	16,5	110
3 63	FQ400 ISO6164-48 ADAP	104,0	58	89,0	18,0	120
3.1/2 70	FQ400 ISO6164-56 ADAP	119,0	63	102,0	20,0	130
4 80	FQ400 ISO6164-64 ADAP	131,0	74	114,0	23,5	140

Fornecimento padrão flange adaptador com canal de o'ring (O'ring face);

S/C = Sem Canal - Especificar acrescentando as letras **S/C** na ref. para flanges ADAP sem canal de O'ring (**Flat face**)

Para solicitar flanges em Aço Inox acrescentar no final do código a letra **"I"**.

Exs. **FQ250 ISO6164 ADAP I (Inox)** , **FQ400 ISO6164 ADAP S/C**.