


FLANGES

FLANGE QUADRADA ISO 6164 ADAPTADOR TAMPÃO

FQ250 ISO6164.... ADAP T (250 bar)
FQ250 ISO6164.... ADAP T (400 bar)

Padrão ISO 6164 (1994:E)

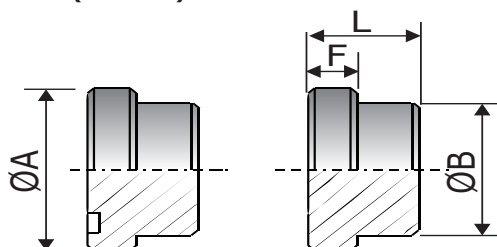

FQ250 ISO6164.... ADAP T
FQ400 ISO6164.... ADAP T
(O'ring face)

FQ250 ISO6164.... ADAP T S/C
FQ400 ISO6164.... ADAP T S/C
(Flat face)

250 bar - ISO 6164-Série L

Flange SAE ISO	Referência	A	B	F	L
3/8 10	FQ250 ISO6164-6 ADAP T	24,5	18,0	6,8	18,0
1/2 13	FQ250 ISO6164-8 ADAP T	30,2	24,0	6,8	20,0
3/4 19	FQ250 ISO6164-12 ADAP T	38,1	31,5	6,8	22,0
1 25	FQ250 ISO6164-16 ADAP T	44,5	38,0	8,0	25,0
1.1/4 32	FQ250 ISO6164-20 ADAP T	50,8	43,0	8,0	30,0
1.1/2 38	FQ250 ISO6164-24 ADAP T	60,4	50,0	8,0	36,0
2 51	FQ250 ISO6164-32 ADAP T	71,4	62,0	9,6	40,0
2.1/2 56	FQ250 ISO6164-40 ADAP T	87,2	76,0	12,0	45,0
3 63	FQ250 ISO6164-48 ADAP T	101,6	90,0	15,0	52,0
4 80	FQ250 ISO6164-64 ADAP T	131,0	114,0	23,5	61,5

400 bar - ISO 6164-Série S

Flange SAE ISO	Referência	A	B	F	L
3/8 10	FQ400 ISO6164-6 ADAP T	26,0	18,0	7,8	18,0
1/2 13	FQ400 ISO6164-8 ADAP T	31,8	24,0	7,8	20,0
3/4 19	FQ400 ISO6164-12 ADAP T	41,3	32,0	8,8	22,0
1 25	FQ400 ISO6164-16 ADAP T	47,6	38,0	9,5	25,0
1.1/4 32	FQ400 ISO6164-20 ADAP T	54,0	44,0	10,3	30,0
1.1/2 38	FQ400 ISO6164-24 ADAP T	63,5	51,0	12,6	36,0
2 51	FQ400 ISO6164-32 ADAP T	79,4	67,0	12,6	40,0
2.1/2 56	FQ400 ISO6164-40 ADAP T	94,2	80,0	16,5	45,0
3 63	FQ400 ISO6164-48 ADAP T	104,0	90,0	18,0	52,0
3.1/2 70	FQ400 ISO6164-56 ADAP T	119,0	102,0	20,0	60,0
4 80	FQ400 ISO6164-64 ADAP T	131,0	114,0	23,5	70,0

Fornecimento padrão flange adaptador com canal de o'ring (**O'ring face**);

S/C = Sem Canal - Especificar acrescentando as letras **S/C** na ref. para flanges ADAP T sem canal de O'ring (**Flat face**)

Para solicitar flanges em Aço Inox acrescentar no final do código a letra **"I"**.

Exs. **FQ250 ISO6164 ADAP T I (Inox)** , **FQ400 ISO6164 ADAP T S/C**.