


FLANGES

FLANGE QUADRADA ISO 6164 e ADAPTADOR DE SOLDA

FQS250 ISO6164..... ADAP
FQS400 ISO6164..... ADAP
(O'ring face)

Padrão ISO 6164 (1994:E)

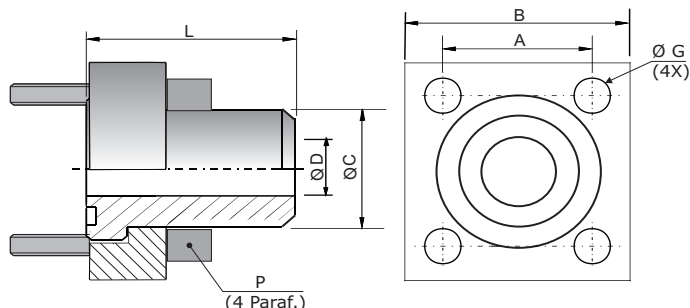

250 bar - ISO 6164-Série L

Flange SAE ISO	Referência	A	B	C	D	L	ØG	P (4 Paraf.)
3/8 10	FQS250 ISO6164-6 ADAP	24,7	40	17,5	10	40	6,6	M6X30
1/2 13	FQS250 ISO6164-8 ADAP	29,7	45	21,6	13	50	9,0	M8X35
3/4 19	FQS250 ISO6164-12 ADAP	35,4	50	27,2	19	60	9,0	M8X35
1 25	FQS250 ISO6164-16 ADAP	43,8	65	34,5	25	70	11,0	M10X40
1.1/4 32	FQS250 ISO6164-20 ADAP	51,6	75	43,0	31	80	13,5	M12X50
1.1/2 38	FQS250 ISO6164-24 ADAP	60,1	90	48,6	38	90	17,5	M16X60
2 51	FQS250 ISO6164-32 ADAP	69,3	100	61,0	50	100	17,5	M16X70
2.1/2 56	FQS250 ISO6164-40 ADAP	83,4	120	76,6	63	110	22,0	M20X80
3 63	FQS250 ISO6164-48 ADAP	102,5	140	89,0	70	120	22,0	M20X90
4 80	FQS250 ISO6164-64 ADAP	113,5	160	114,0	90	140	25,0	M24X100

400 bar - ISO 6164-Série S

Flange SAE ISO	Referência	A	B	C	D	L	ØG	P (4 Paraf.)
3/8 10	FQS400 ISO6164-6 ADAP	24,7	40	17,5	10	40	6,6	M6X30
1/2 13	FQS400 ISO6164-8 ADAP	29,7	45	21,6	13	50	9,0	M8X35
3/4 19	FQS400 ISO6164-12 ADAP	35,4	50	27,2	18	60	9,0	M8X35
1 25	FQS400 ISO6164-16 ADAP	43,8	65	34,5	22	70	11,0	M10X40
1.1/4 32	FQS400 ISO6164-20 ADAP	51,6	75	43,0	28	90	13,5	M12X50
1.1/2 38	FQS400 ISO6164-24 ADAP	60,1	90	48,6	32	90	17,5	M16X60
2 51	FQS400 ISO6164-32 ADAP	69,3	100	61,0	41	100	17,5	M16X70
2.1/2 56	FQS400 ISO6164-40 ADAP	83,4	120	76,6	50	110	22,0	M20X80
3 63	FQS400 ISO6164-48 ADAP	102,5	150	89,0	58	120	26,0	M24X90
3.1/2 70	FQS400 ISO6164-56 ADAP	113,1	160	102,0	63	130	26,0	M24X100
4 80	FQS400 ISO6164-64 ADAP	123,7	180	114,0	74	140	33,0	M30X120

Para solicitar flanges em Aço Inox acrescentar no final do código a letra "I".
Exs. FQS250 ISO6164-12 ADAP I.

Fornecimento de conjunto completo com parafusos e o'ring.