


FLANGES

FLANGE ADAPTADOR SAE PARA SOLDA ENCAIXE - TUBO SCHEDULE

FSOP.... SW ADAP (Standard)
FSORP.... SW ADAP (High Pressure)

Padrão SAE J518 / ISO 6162
(JAN2013 / 2-2012)

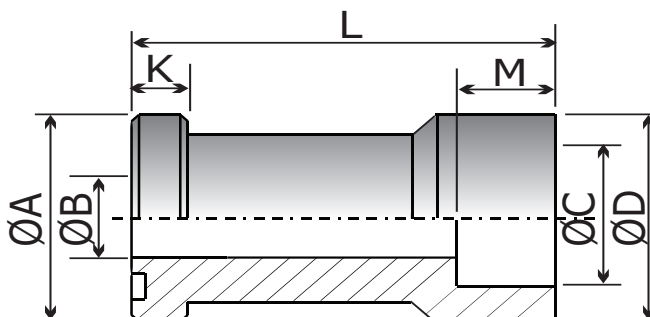

FSOP..... SW ADAP
FSORP..... SW ADAP
(O'ring face)

Standard

Tubo SCH (in)	Flange Nominal (in)	Ref.	A	B	C	D	L	K	M
3/4	3/4	FSOP-12-12 SW ADAP	38,10	19,0	27,0	38,10	59,4	6,7	14,2
1	1	FSOP-16-16 SW ADAP	44,45	25,4	33,7	44,45	60,4	8,0	16,0
1.1/4	1.1/4	FSOP-20-20 SW ADAP	50,80	31,8	42,5	50,80	66,5	8,0	17,3
1.1/2	1.1/2	FSOP-24-24 SW ADAP	60,32	38,1	48,8	60,32	73,2	8,0	19,3
2	2	FSOP-32-32 SW ADAP	71,42	50,8	61,1	71,42	76,2	9,5	22,3

High Pressure

Tubo SCH (in)	Flange Nominal (in)	Ref.	A	B	C	D	L	K	M
1	1	FSORP-16-16 SW ADAP	47,62	25,4	33,7	50,8	77,7	9,5	16,0
1.1/4	1.1/4	FSORP-20-20 SW ADAP	53,97	28,6	42,5	58,7	84,0	10,3	17,5
1.1/2	1.1/2	FSORP-24-24 SW ADAP	63,50	34,9	48,8	69,8	99,8	12,6	19,0
2	2	FSORP-32-32 SW ADAP	79,37	47,6	61,1	82,5	103,1	12,6	22,3

Fornecimento padrão flange adaptador com canal de o'ring (O'ring face);

S/C = Sem Canal - Especificar acrescentando as letras S/C na ref. para flanges sem canal de O'ring (Flat face)

Para solicitar flanges em Aço Inox acrescentar no final do código a letra "I".

Exs. FSOP-12-12 SW ADAP I , FSORP-16-16 SW ADAP S/C I.